

# WiFi BLE Smart Switch

## User Manual



No.WIFIBLE\_eW01

# 1.After-sale Service & Warm Tips

If you cannot connect with the quick flash mode(light flash every 1 second),please use the AP mode slow flash(light flash every 3 seconds) to connect with the switch.

This WiFi BLE smart switch is provided with one-year after-sale service since the date of purchasing.

If you have any questions while operating the product or the switch is defective,or the switch cannot connect with the WiFi, please feel free to contact the service mail.We will help you solve the problems and we can send you free replacement.

Tips:

1.1 This WiFi BLE Smart Switch can only support 2.4G network and cannot work with 5.0G network,please check if your home network is 2.4G and make sure that your phone has been connected to your wifi home work.

## 2. Caution

2.1 Cut the power before installing so as to protect yourself from electric shock.

2.2 Please ensure that the neutral and live wires are installed correctly.

2.3 Please pay attention to tighten the screws and wires.

## 3. Product information

### 3.1 Features

Touch Control: On/Off

App Control: On/Off

Rf433 remote (Optional)

Scheduled/Timer/Shares

Works with Amazon alexa

Works with Amazon siri

Works with Google Home

Works with IFTTT

### 3.2 Specification

Power Supply: 95V-250V AC

Max. Current: 10A

Max. Power: 2200W/gang

Wireless: 802.11 b/g/n 2.4G

Security: WPA-PSK/WPA2-PSK

Material: ABS+Tempered Glass

Size: 86\*86\*32mm; EU/UK plug

Size: 120\*76\*32mm, US plug




Certification: CE, RoHS, FCC



## 4.Install the WiFi BLE Smart Switch

This WiFi BLE smart switch can't work without NeutralLine, make sure have N line connection  
Please cut off the power when doing the installation & un-installation


- 4.1 Open the switch glass panel by screw from the flame hole.
- 4.2 Connect the wiring as wiring diagram
- 4.3 Tighten the screw into the wall mount
- 4.4 Click back the touch panel into place
- 4.5 Connect the power supply after finishing the installation steps.

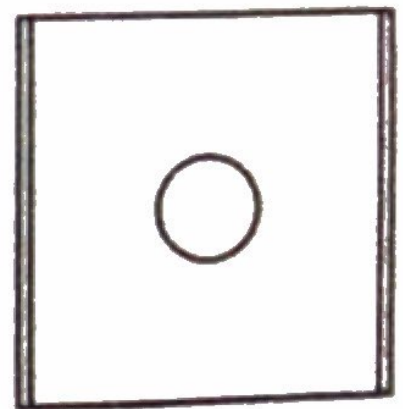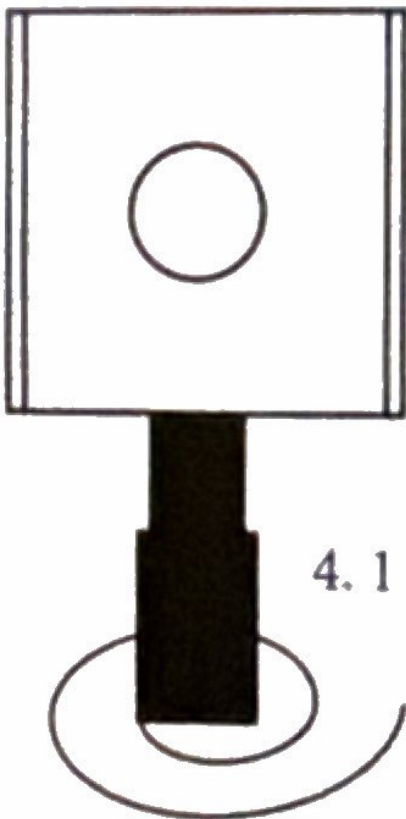

Please reference to correct diagram with your order switch version!

## A: Wiring Diagram for N & L version

1. Live connect to 'L' terminal
2. Neutral connect to 'N'
3. Lamp Live connect to L1 L2 L3 terminal

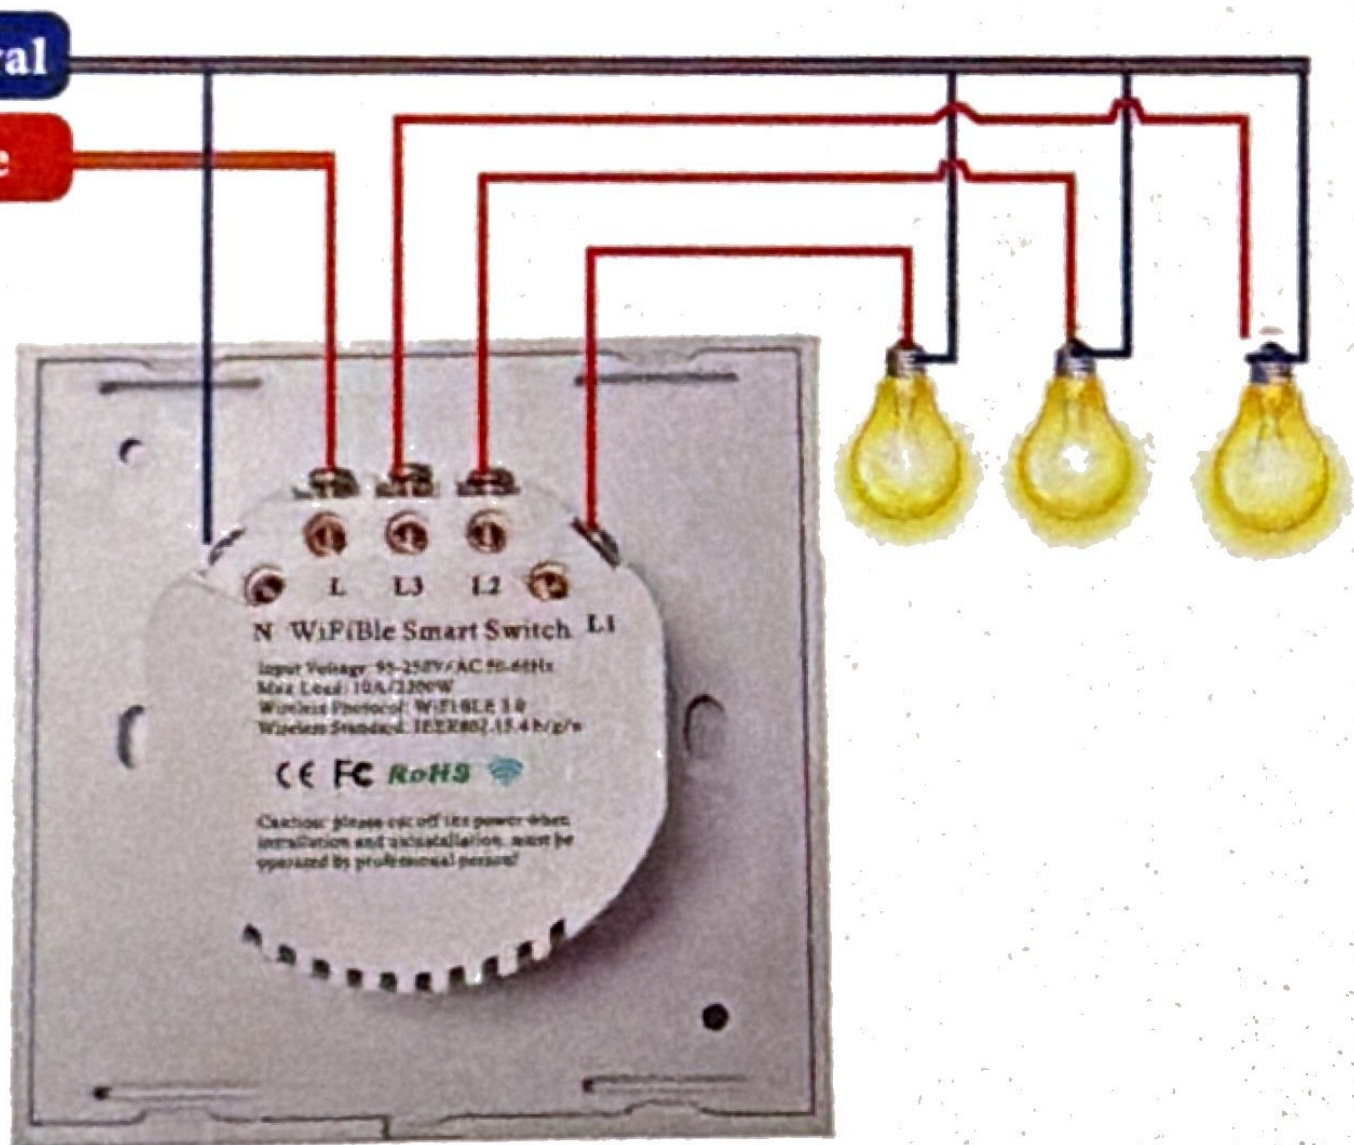




## C: Wiring Diagram for Single L version

This version switch can work without connect the Neutral Line.

Wiring as the below photo.

**Importance:** the capacitor must be connect on the L1 line

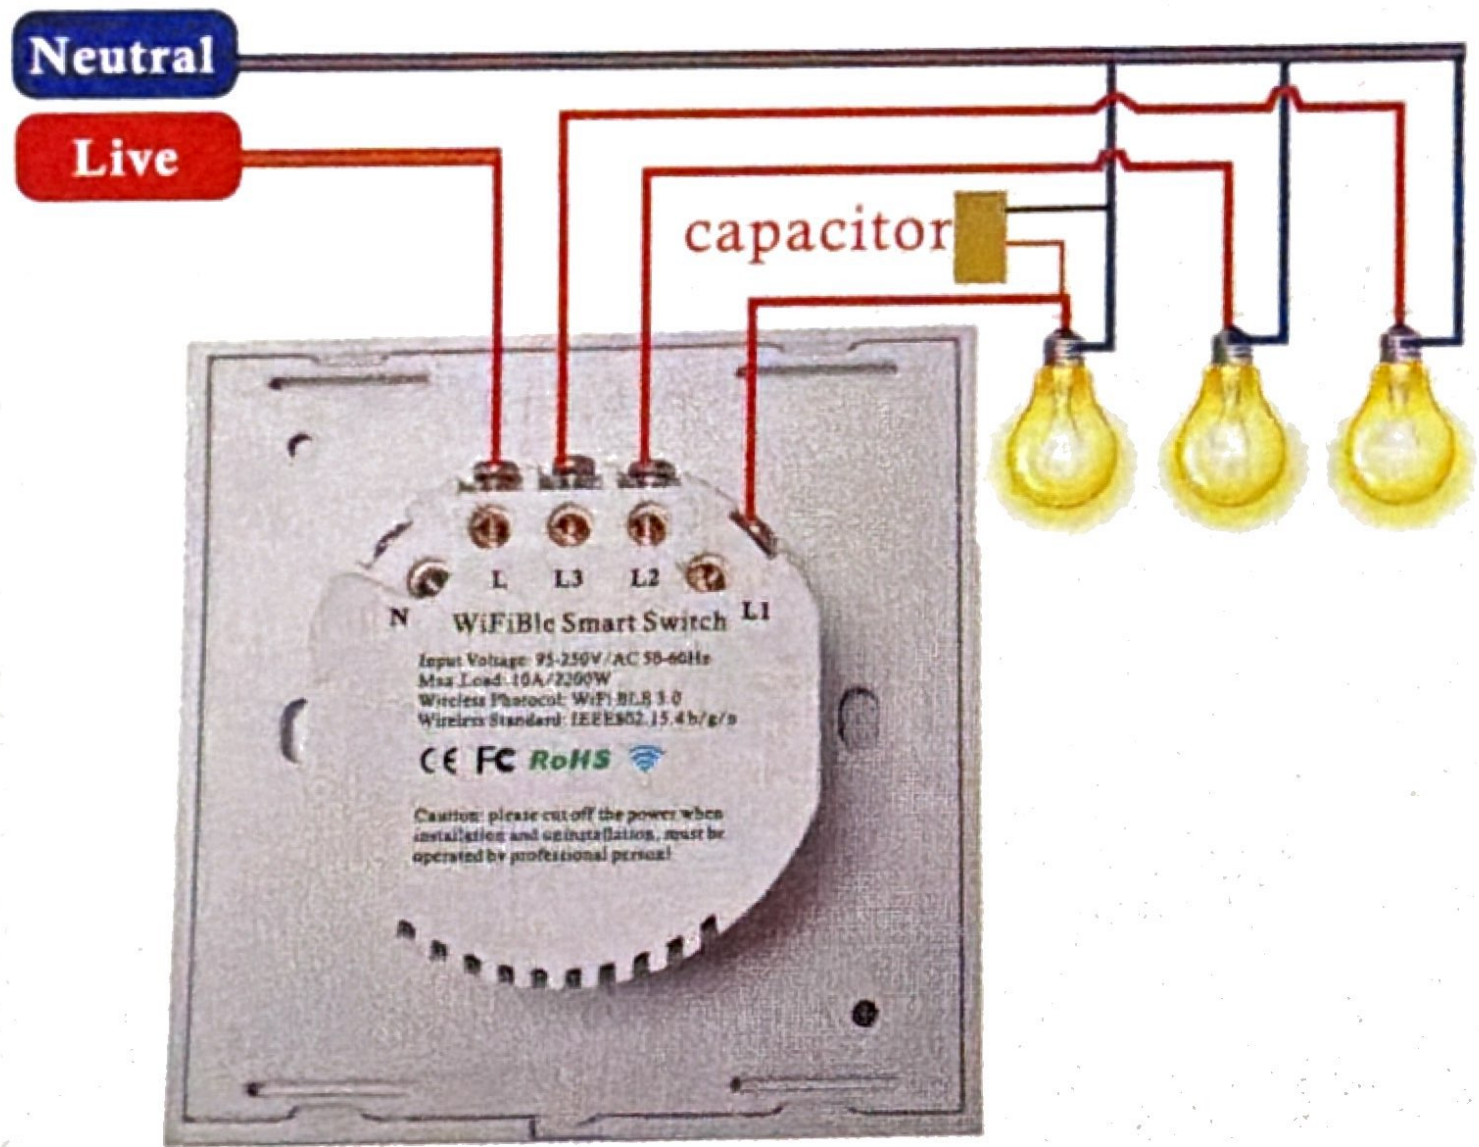

## 5.Download & Install the APP

5.1 Use the mobile phone to scan the QR code or search the “eWelink”

from the APP store download and install the APP



5.2 Input account name and password to login.If you don't have an account,please register an account first.System will identify your country automatically.You can use your mobile phone number as your account name.

5.3 Tap on “Next” to get a verification code via SMS on your mobile phone.Enter a desired password.

5.4 Tap on”Confirm” to finish your registration.



# Add New Device

There is two pairing mode Auto & EZ mode

6. 1 The Switch automatically enter to the pairing mode when each time power on,

the wifi LED rapidly blink (Auto Mode)

6. 2 To connect quick pair mode(EZ mode)

6.2.1 Tap random button of switch

around 5s until the wifi LED rapidly blink/

6. 3 Connect your phone to local Wi-Fi

6.4 Enable your phone bluetooth

6. 5 tap “+” icon on the App to add new device,

the app will automatically discover all switches which are standby on pairing mode

6.6 Follow the app trips to fix the wifi network name and password till new device register successful.

In case the Quick pair mode can't find the device, please change the bluetooth mode, do the steps according to the app trips, recommend to use the bluetooth mode first as it is easy and fast