OPERATING MANUAL

description

The Zigbee switch NOUS D2Z (hereinafter referred to as the switch) is designed to organize automatic and manual switching off of electrical appliances in the room, by remote access via the Internet, using a smartphone or tablet with the Nous Smart Home application installed. Communication with the switch is configured via a remote server using the P2P protocol, for which a wireless zigbee adapter is used. The switch is equipped with a mechanical button and a light indication of the device status. The device is equipped with an electromechanical relay.

NOTE: You will need a Nous E1, Nous E7 or


other Tuya-compatible ZigBee gateway/hub to connect.

The connection of a smart socket to the Internet cannot be guaranteed in all cases, as it depends on many conditions: the quality of the communication channel and intermediate network equipment, the make and model of the mobile device, the version of the operating system, etc.

PREVENTIVE MEASURES

- Read these instructions carefully.
- Use the product within the temperature and humidity limits specified in the technical data sheet.
- Do not install the product near heat sources, such as radiators, etc.
- Do not allow the device to fall or be subjected to mechanical stress.
- Do not use chemically active or abrasive cleaning agents to clean the product. Use a damp flannel cloth.
- Do not overload the specified capacity. This may cause a short circuit and electric shock.
- Do not disassemble the product yourself diagnostics and repair of the device should only be carried out at a certified service center.


Design and controls

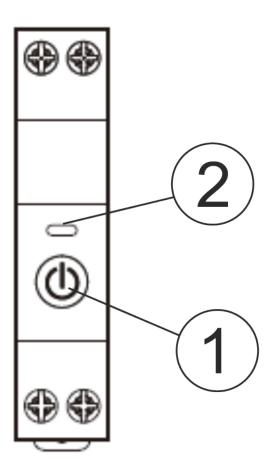

N⁰	Name	description
1	Button	A short press of the button switches the device "ON" "OFF". A long press of the button (5-7 C) resets the device settings and network connection parameters.
2	Indicator	Shows the current status of the device

Installation

Installation procedure:

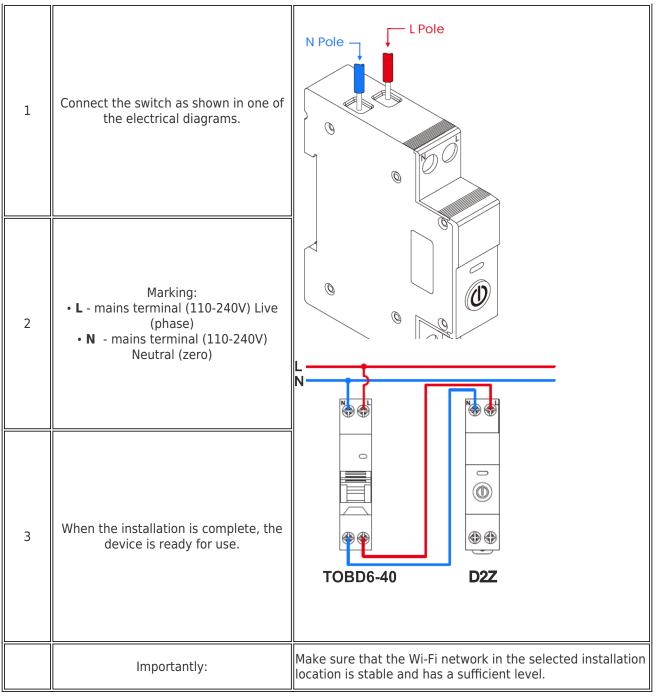

Connection

To connect the Nous D2Z device, you need a smartphone based on the Android or iOS mobile operating system with the Nous Smart Home application installed. This mobile application is free and available for download from the Play Market and App Store. The QR code for the application is given below:



After installing the application, for it to work correctly, you need to grant it all permissions in the appropriate section of your smartphone settings. Then you need to register a new user of this application.


How to connect the device to the Zigbee network:

1	Connect your smartphone to the access point that will be used to connect the device. Make sure that the network frequency range is 2.4 GHz, otherwise the device will not connect, as Zigbee Hubs are not designed to work with 5 GHz Wi-Fi networks; (your ZigBee Hub must already be connected to the app)		
2	Plug the device into the network. If the light indicator does not blink quickly, press the button for 5-7 seconds to reset the smart socket settings to factory defaults.		
3	Open the Nous Smart Home app and click the add new device button		
4	An auto-scan will appear, prompting you to add a new device. Confirm the connection and start pairing.		
5	If auto-scan doesn't see your device, you can select it manually from the device list		
Import Import <th>C Add Device Survice paring mode. Gateway:Zigbee Smart Gateway Discovering devices Discovering devices Carber Discovering devices Carber Discovering devices Carber Discovering devices Discovering devi</th>	C Add Device Survice paring mode. Gateway:Zigbee Smart Gateway Discovering devices Discovering devices Carber Discovering devices Carber Discovering devices Carber Discovering devices Discovering devi		
6	In the "Add Manually" tab select the "Smart Switches" category, and in it the "D27 Smart Switch" mode		
7	In the window that opens, select "next step" and click the "Forward" button;		
8	connecting to a Zigbee hub		

	Control Temperature Cutedoor Rengerature Cutedoor	Zigbee Smart Gateway Online devices: 0 Added devices Vou haven' create any device yet Tap 'Add' to start
		A window will appear indicating the degree of network connection and adding the current user of the application to the list of devices:
9		Once the procedure is complete, a window will appear where you can name the device and select the room it is in. The device name will also be used by Amazon Alexa and Google Home.
10		To delete all data from the smart plug, you need to "Delete device", "power off and delete all data" in the device menu
When the	device is removed from the user's device list in	the application, the smart, cacket cettings are recent to factory settings and you will need to go through the Wi Ei connection

When the device is removed from the user's device list in the application, the smart socket settings are reset to factory settings and you will need to go through the Wi-Fi connection procedure again. If the password for the Wi-Fi access point was entered incorrectly, the application will display a "Failed to connect to Wi-Fi" window after the timer expires, offering step-by-step steps to fix the problem.

How to connect your device to Alexa

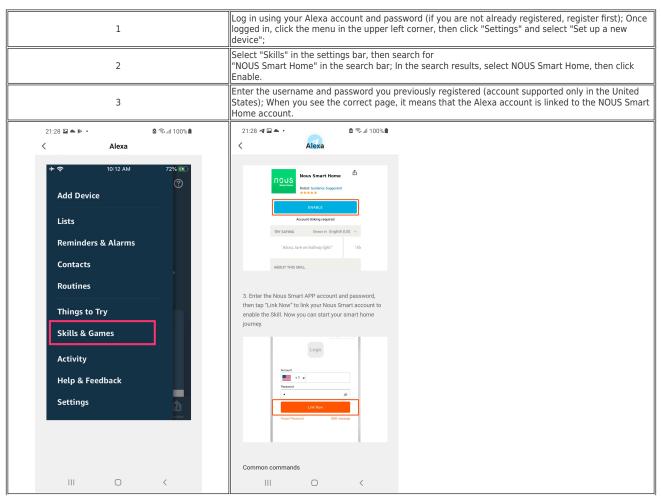

4	Device Discovery: Users need to say to Echo: "Echo (or Alexa), open my devices". Echo will start to find devices added in NOUS Smart Home APP, it will take about 20 seconds to show the result. Or you can click "Open Devices" in Alexa APP, it will show the devices that have been found successfully. Note: "Echo" is one of the wake-up names, which can be any of these three names (Settings): Alexa/Echo/Amazon.	
5	List of support skills User can control devices with the following instructions: Alexa, turn on [device] Alexa, turn off [device]	
Attention: the device name must match the NOUS Smart Home APP.		